

## Features & Benefits

- High energy and power density
- Long, stable, high power
- High safety performance
- Ideal for power assisted bicycles, 2-way radios, medical devices and robotics.


\* At temperatures below 10°C, charge at a 0.25C rate.

## Specifications

Rated capacity <sup>(1)</sup>	Min. 2700mAh
Capacity <sup>(2)</sup>	Min. 2750mAh Typ. 2900mAh
Nominal voltage	3.6V
Charging	CC-CV, Std. 1375mA, 4.20V, 4.0 hrs
Weight (max.)	48.0 g
Temperature	Charge*: 0 to +45°C Discharge: -20 to +60°C Storage: -20 to +50°C
Energy density <sup>(3)</sup>	Volumetric: 577 Wh/l Gravimetric: 207 Wh/kg


<sup>(1)</sup> At 20°C <sup>(2)</sup> At 25°C <sup>(3)</sup> Energy density based on bare cell dimensions

## Dimensions

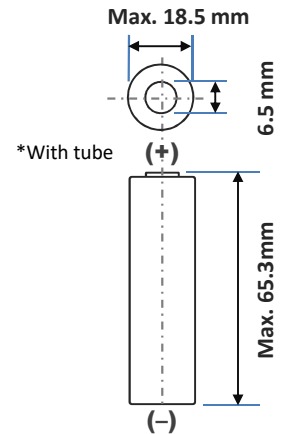


For Reference Only


## Charge Characteristics

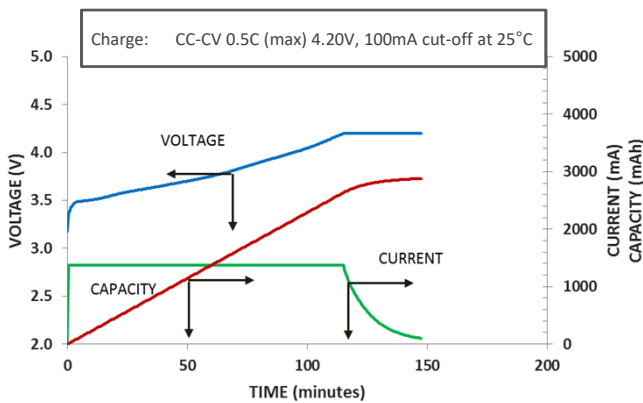


## Cycle Life Characteristics

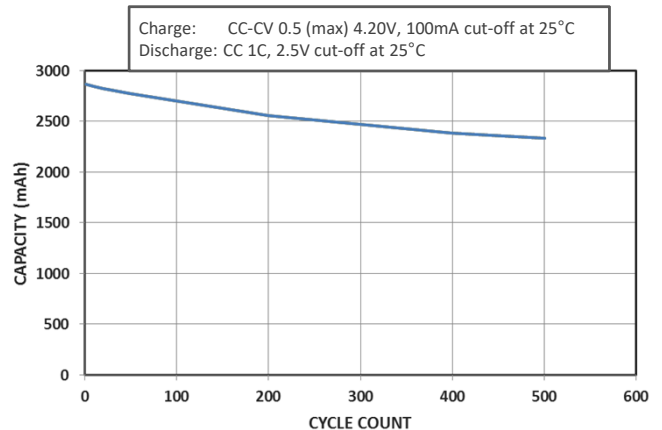

## Discharge Characteristics (by temperature)

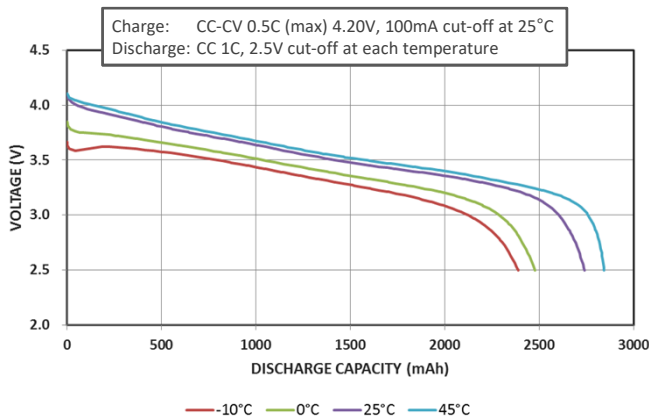

## Discharge Characteristics (by rate of discharge)

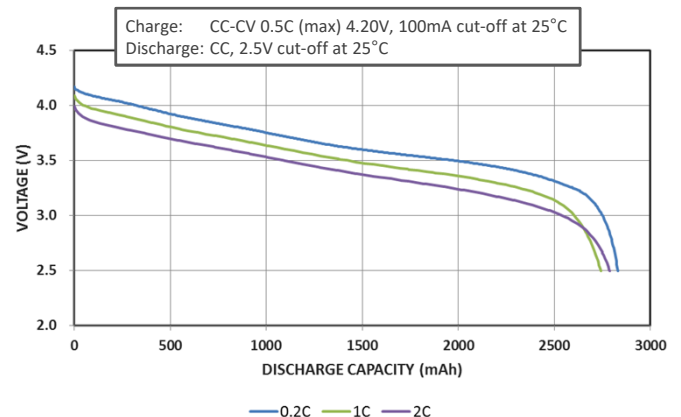

The data in this document is for descriptive purposes only and is not intended to make or imply any guarantee or warranty.